

HuskyGuard Under-Drain Stormwater Filter

Prevent oil and sediment from entering your drains.



PERFECT FOR HIGH TRAFFIC CATCH BASINS




THE HUSKY ADVANTAGE

A custom-sized drain insert system.

Prevent oil and sediment from entering your drains and creating stormwater non-compliance issues with the Spilltration® HuskyGuard Under-Drain Stormwater Filter.


- ✓ Spilltration® Husky filtration layer for removing oils, fuels, sheens, and sediments.
- ✓ Built to withstand high flow rates. Raised center captures debris.
- ✓ UV-Resistant. Will not degrade in sunlight.
- ✓ Spilltration® Husky filter material is made from 100% post-consumer waste.

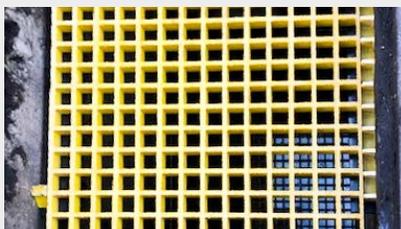

Heavy-duty fiberglass reinforced plastic grating holds the filter in place. Won't corrode or rust.



Overflow port prevents water from backing up in a heavy rain event.

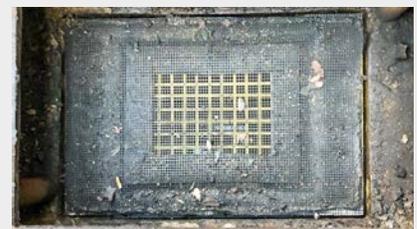

Stays in place. The storm drain insert will not fall into the drain.



SKU	SPL108
Substance Filtered	Oils, Sediments, Debris, and Trash
Dimensions	Custom
Overflow Hole Size	6" x 6"
Sold as	Each
Recycled Content	Made from 100% post-consumer waste
UV Resistant	YES

Under-Drain Stormwater Filter Installation and Maintenance:

1. Clear all debris from the existing storm grate
2. Remove grate
3. Install two angle iron supports with tap cons, approximately 1 foot (varies by design) from the top of the storm drain
4. Install fiberglass grating
5. Install Under-Drain Stormwater Filter
6. Install the original stormwater cover
Inspect regularly or as needed

Trusted solutions used by:

