

05A Oil Transfer Hoses and Couplings

Oil Transfer Hose Set 3", for Minimax 12/25 or Oil Transfer Pump, Spate C75 - 224990



Lamor semi rigid oil transfer hoses are embedded in grey oil resistant super elastic flexible PVC compound.


The semi rigid hoses are suitable for the medium duty suction and discharge of black fuel oils, gas oils, kerosene, paraffin, hydraulic oils, mineral based oils, lubricating oils and greases. It's not suitable for benzene, xylol and aromatic solvents.

Temperature range of the hoses is from -20°C degrees to +55°C degrees (-4°F to +131°F).

Although Lamor semi rigid hoses are designed for medium duty applications this hose remains very flexible and is easy to handle in use.

Lamor Semi rigid Oil Transfer Hose Set for Lamor Minimax 25 and Minimax 12 (in fiberglass, Aluminum or SS models) skimmers includes the following components:

- | | |
|--|--------|
| 2 pcs Oil transfer hose rigid Apollo 3" L-5m Camlock Female/Male | 200016 |
| 1 pc Oil transfer hose rigid Apollo 3" L-10m Camlock Female/Male | 200017 |
| 2 pcs Hose float for 2"-3" hose | 226118 |

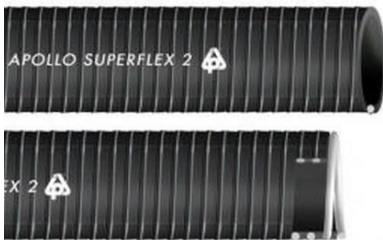

TECHNICAL SPECIFICATIONS

Size	76,2 mm	3 in.
Length, total	20 m	65 ft
Weight (Total)	40 kg	88.1 lbs
2 x 5 m (2 x 16 ft)	2 x 10 kg	2 x 22 lbs
1 x 10 m (1 x 33 ft)	18 kg	39.7 lbs
Hose floats	2 x 1 kg	2 x 2,2 lbs